

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
12 February 2004 (12.02.2004)

PCT

(10) International Publication Number
WO 2004/013691 A1

(31) International Patent Classification: G03B 42/04,
A61B 6/14

(74) Agent: HEDLUND, Alf; Patentkonsult Alf Hedlund AB,
P.O. Box 171, S-931 22 Skelefteå (SE).

(21) International Application Number:
PCT/SE2003/001249

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,
MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC,
SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA,
UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(22) International Filing Date: 4 August 2003 (04.08.2003)

(25) Filing Language: Swedish

(26) Publication Language: English

(30) Priority Data:
SE 0202371-1 5 August 2002 (05.08.2002) SE

(71) Applicant (*for all designated States except US*): JAN E
WESTERLUND AB [SE/SE]; Skogvaktaregatan 4, S-461
33 Trollhättan (SE).


(84) Designated States (*regional*): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO,
SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM,
GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(72) Inventor; and
(75) Inventor/Applicant (*for US only*): WESTERLUND, Jan
[SE/SE]; Skogvaktaregatan 4, S-461 33 Trollhättan (SE).

[Continued on next page]

(54) Title: ARRANGEMENT RELATED TO A DENTAL SENSOR

(57) Abstract: The present invention pertains to an arrangement relating to a sensor plate for dental X-raying or photographic purposes, wherein the plate (10;10';10'';10''') for example is of a digital or analogue type and is intended for one-time use or for many-times use. The sensor plate (10;10';10'';10''') includes or carries elements (30,31;30',31';61-64;80-82;90;95) that are intended for engagement with a plate holding element (40) in a number of different positions (A-F). The holding element (40) includes means (51,52;50) for engagement with engagement elements (30,31;30',31';61-64;80-82;90;95) of the sensor plate.

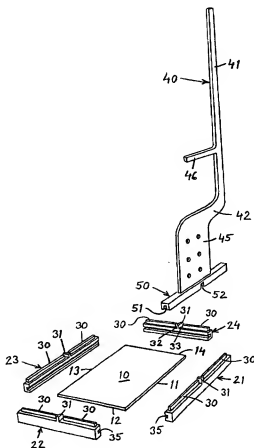

WO 2004/013691 A1